

Bar Light IP69K

infrared, 1000 mm

LB9I901

Part Number



- Certified for wash-down environments (DIN 400 50 Part 9)
- Industry-leading performance of the LBA bar light
- Mounting bracket included in scope of delivery
- No external control required

wenglor's LB9 series bar lights are industrial IP69K lights with food-safe housing. Suitable for environments that require high-pressure/high-temperature cleaning with steam and cleaning chemicals. The homogeneous and intense luminous flux of the illumination device enables many types of applications with working distances in the near and far range. The LB9 bar lights can be used in continuous mode or synchronized with the machine vision camera in strobe mode via PNP or NPN inputs. The standard L-brackets enable 360° rotation for easy installation.

Technical Data



Optical Data	
Light Source	Infrared Light
Wavelength	850 nm
Risk Group (EN 62471)	1
Beam angle	± 17 °
Infrared light output	95,75 W/m²
Measuring point distance	200 mm
Environmental conditions	
Temperature Range	-20...40 °C
Storage temperature	-20...60 °C
Atmospheric humidity	< 80%, non-condensing
Electrical Data	
Supply Voltage	21,6...26,4 V DC
Power	105,6 W
Current Consumption Continuous Mode (Ub = 24 V)	4,4 A
Rise time	15 µs
Fall time	10 µs
Input signal	PNP/NPN
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Protection Class	III
Dimming	0...10 V ± 100...30%
Overdrive	no
Mechanical Data	
Luminous Field Length (L)	1000 mm
Housing Material	Plastic, PMMA
Housing Material	Stainless steel, V4A (1.4404 / 316L)
Degree of Protection	IP69K
Optic Cover	Plastic, PMMA
Connection	5-core cable, 5 m
Cable Jacket Material	Plastic, PUR
Max. cable lenght	20 m
Outer diameter (d)	5,4 mm
Function	
Operating modes	Continuous, Strobe

Connection Diagram No.

007

Complementary Products

ZC4G003 connection cable
ZDCG004 connection cable
ZDCG005 connection cable

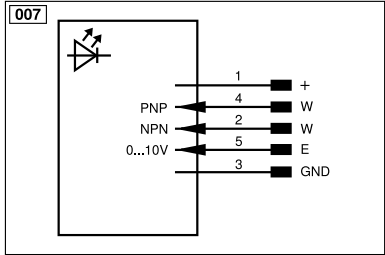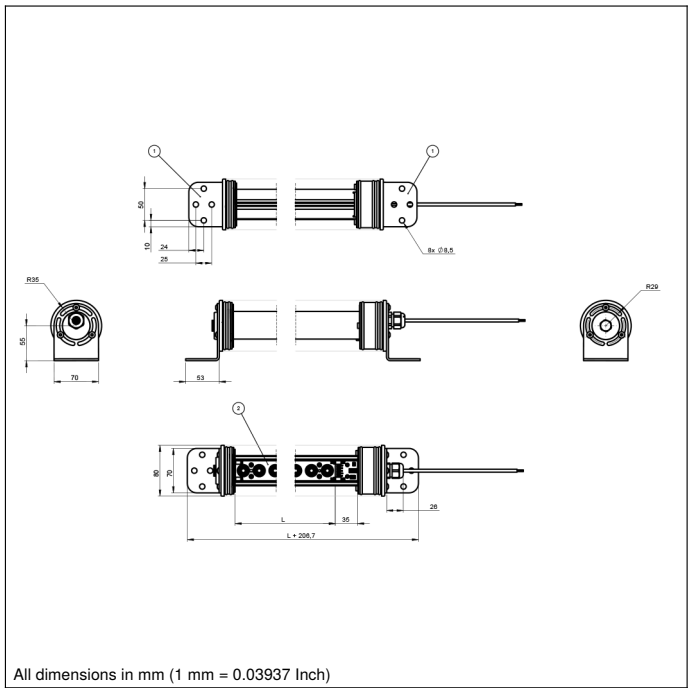

Legend					
+	Supply Voltage +	nc	Not connected	ENBRS422	Encoder B/B (TTL)
-	Supply Voltage 0 V	U	Test Input	ENA	Encoder A
~	Supply Voltage (AC Voltage)	Ü	Test Input inverted	ENb	Encoder B
A	Switching Output (NO)	W	Trigger Input	AMIN	Digital output MIN
Ä	Switching Output (NC)	W-	Ground for the Trigger Input	AMAX	Digital output MAX
V	Contamination/Error Output (NO)	O	Analog Output	AOK	Digital output OK
Ÿ	Contamination/Error Output (NC)	O-	Ground for the Analog Output	SY In	Synchronization In
E	Input (analog or digital)	BZ	Block Discharge	SY OUT	Synchronization OUT
T	Teach Input	Amv	Valve Output	OLt	Brightness output
Z	Time Delay (activation)	a	Valve Control Output +	M	Maintenance
S	Shielding	b	Valve Control Output 0 V	rsv	Reserved
RxD	Interface Receive Path	SY	Synchronization	Wire Colors according to DIN IEC 60757	
TxD	Interface Send Path	SY-	Ground for the Synchronization	BK	Black
RDY	Ready	E+	Receiver-Line	BN	Brown
GND	Ground	S+	Emitter-Line	RD	Red
CL	Clock	±	Grounding	OG	Orange
E/A	Output/Input programmable	SnR	Switching Distance Reduction	YE	Yellow
IO-Link	IO-Link	Rx+/-	Ethernet Receive Path	GN	Green
PoE	Power over Ethernet	Tx+/-	Ethernet Send Path	BU	Blue
IN	Safety Input	Bus	Interfaces-Bus A(+)/B(-)	VT	Violet
OSSD	Safety Output	La	Emitted Light disengageable	GY	Grey
Signal	Signal Output	Mag	Magnet activation	WH	White
BL_D+/-	Ethernet Gigabit bidirect. data line (A-D)	RES	Input confirmation	PK	Pink
ENo RS422	Encoder 0-pulse 0/Ü (TTL)	EDM	Contact Monitoring	GNYE	Green/Yellow
PT	Platinum measuring resistor	ENARS422	Encoder A/A (TTL)		